



RESIDENTIAL WIRES



PRODUCT

- ▶ HRFR
- ▶ FR-LSH
- ▶ COMIT
- ▶ ZHFR

PRODUCT FEATURES:



FLAME
RETARDANT



ENERGY SAVING
WIRES

99.9%

HIGH PURITY
COPPER



EASY TO PULL
INSIDE CONDUITS



20% HIGHER
HEAT RESISTANCE



VIRGIN GRADE
PVC RESIN



LEAD FREE

RESIDENTIAL WIRES

1

HRFR
HEAT RESISTANT FLEXIBLE RIGID

CLASS-2

Single Core unsheathed Multistrand flexible High Conductivity Bright Electrolytic annealed copper, HR FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG	MRP (90M)
0.75	11/0.3	8	OLD-1001	28	1,572
1	14/0.3	13	OLD-1002	24	1,951
1.50	22/0.3	17	OLD-1003	20	2,836
2.50	36/0.3	24	OLD-1004	12	4,473
4	56/0.3	30	OLD-1005	8	6,925
6	84/0.3	38	OLD-1006	6	10,249
Size	Config	Amps	Product code	PKG	MRP (45M)
1	14/0.3	13	OLD-1007	48	966
1.50	22/0.3	17	OLD-1008	40	1,392
2.50	36/0.3	24	OLD-1009	28	2,237
4	56/0.3	30	OLD-1010	20	3,463
6	84/0.3	38	OLD-1011	12	5,125



SCAN TO KNOW MORE ABOUT THE PRODUCT

2

FR-LSH
FIRE RETARDANT LOW SMOKE HALOGEN

CLASS-2

Single Core unsheathed Multistrand flexible High Conductivity Bright Electrolytic annealed copper, FR-LSH PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG	MRP (90M)
1	14/0.3	13	OLD-2001	24	1,968
1.50	22/0.3	17	OLD-2002	20	2,864
2.50	36/0.3	24	OLD-2003	12	4,605
4	56/0.3	30	OLD-2004	8	7,130
6	84/0.3	38	OLD-2005	6	10,562
Size	Config	Amps	Product code	PKG	MRP (180M)
1	14/0.3	13	OLD-2006	12	3,438
1.50	22/0.3	17	OLD-2007	10	5,271
2.50	36/0.3	24	OLD-2008	7	8,479
4	56/0.3	30	OLD-2009	5	13,046
6	84/0.3	38	OLD-2010	3	18,736



SCAN TO KNOW MORE ABOUT THE PRODUCT

3

COMIT

CLASS-5

Single Core unsheathed Multistrand flexible High Conductivity Bright Electrolytic annealed copper, FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG	MRP (90M)
1	20/0.25	13	OLD-3001	24	1,697
1.50	30/0.25	17	OLD-3002	20	2,476
2.50	50/0.25	24	OLD-3003	12	4,101
4	80/0.25	30	OLD-3004	8	6,846
6	84/0.3	38	OLD-3005	6	*



SCAN TO KNOW MORE ABOUT THE PRODUCT

4

ZHFR

CLASS-2

Single Core unsheathed Multistrand flexible High Conductivity Bright Electrolytic annealed copper, ZHFR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG	MRP (90M)
1	14/0.3	13	OLD-4001	24	2,048
1.50	22/0.3	17	OLD-4002	20	2,949
2.50	36/0.3	24	OLD-4003	12	4,740
4	56/0.3	30	OLD-4004	8	7,336
6	84/0.3	38	OLD-4005	6	10,858




SCAN TO KNOW MORE ABOUT THE PRODUCT

NOTE

PACKING : ORBIT HRFR, FR-LSH WIRES are supplied in 90M, 45M, 180M coils which are packed in master cartons as specified above
COLOURS : ORBIT HRFR, FR-LSH WIRES are available in five common colours: Red, Yellow, Blue, White, Black & Green.

INDUSTRIAL CABLE

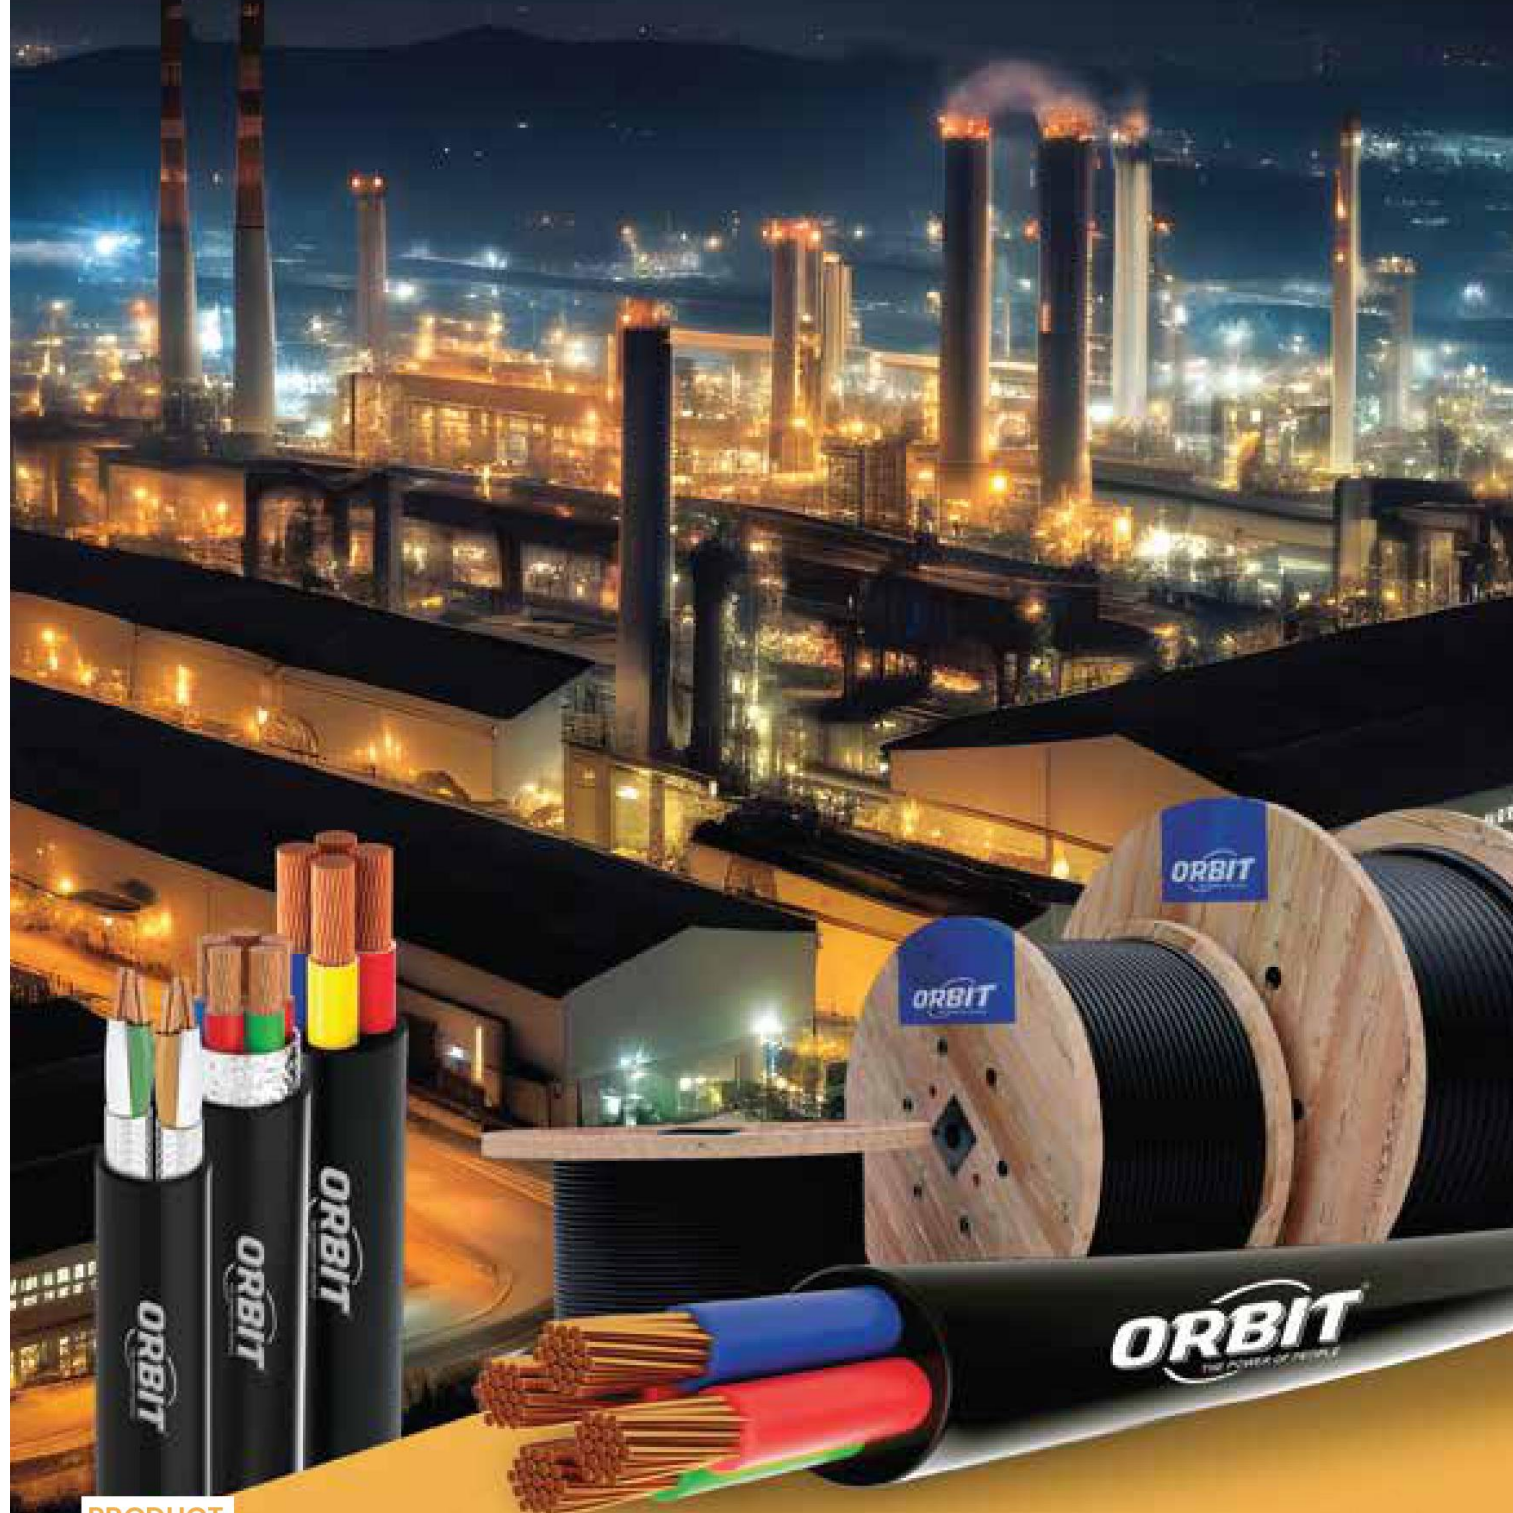

PRODUCT

- ▶ MULTISTRAND SINGLE CORE
- ▶ MULTISTRAND MULTI CORE
- ▶ CONTROL CABLES
- ▶ BRAIDED SHIELDED CABLES
- ▶ SOLAR CABLES
- ▶ WELDING CABLES
- ▶ RUBBER CABLES

PRODUCT FEATURES:

FR-LSH
FR-LSH
COMPOUNDV


GLOSSY & SMOOTH
CABLE SURFACE


HIGHEST QUALITY
COPPER


LOW EMISSION
ON TOXIC GASES


VIRGIN GRADE
PVC RESIN


HIGH ABRASION
RESISTANCE



ETHYLENE PROPYLENE
RUBBER


20% HIGHER
HEAT RESISTANCE

5

MULTISTRAND SINGLE & MULTI CORE

Multistrand bright electrolytic annealed bare copper conductor, FR-LSH PVC Insulated & PVC sheathed multicore round flexible Industrial Cables for working voltages upto and including 1100 Volts, as per IS 694 (HSN CODE: 8544)



Size	Config	Amps	Product code	1 Core	P	2 Core	P	3 Core	P	4 Core	P	5 Core	P
0.50	16/0.2	5	OLD-5001x...	979	35	2,781	6	3,721	5	4,867	5	6,254	4
0.75	24/0.2	8	OLD-5002x...	1,359	30	3,633	6	5,118	5	6,660	5	8,697	4
1.00	32/0.2	13	OLD-5003x...	1,786	24	4,631	5	6,514	5	8,366	5	10,774	4
1.50	30/0.25	17	OLD-5004x...	2,584	20	6,391	5	8,987	4	11,583	4	15,037	3
2.50	50/0.25	24	OLD-5005x...	4,230	14	10,489	4	14,359	3	19,117	2	24,018	2
4.00	56/0.25	30	OLD-5006x...	6,661	10	15,840	2	21,797	2	28,698	2	36,247	1
6.00	84/0.3	38	OLD-5007x...	9,898	6	22,949	1	32,155	1	42,704	1	53,398	1
10.00	140/0.3	52	OLD-5008x...	17,698	4	39,122	1	54,741	1	71,330	1	90,516	1
16.00	126/0.4	70	OLD-5009x...	29,456	3	61,019	1	85,356	1	112,204	1	142,273	1


Size	Config	Amps	Product code	PKG	1 Core	2 Core	3 Core	4 Core	5 Core
25.00	196/0.4	88	OLD-5010x...	500 MTR	463	934	1,351	1,774	2,290
35.00	276/0.4	112	OLD-5011x...	500 MTR	643	1,278	1,841	2,433	3,199
50.00	396/0.4	146	OLD-5012x...	500 MTR	905	*	2,592	3,445	4,374
70.00	360/0.5	216	OLD-5013x...	500 MTR	1,290	*	3,687	4,892	6,256
95.00	480/0.5	262	OLD-5014x...	500 MTR	1,738	*	5,238	6,741	8,593
120.00	608/0.5	310	OLD-5015x...	500 MTR	2,202	*	6,529	8,391	*
150.00	750/0.5	355	OLD-5016x...	500 MTR	2,782	*	7,980	10,515	*
185.00	931/0.5	415	OLD-5017x...	300 MTR	3,418	*	9,731	12,868	*
240.00	1200/0.5	500	OLD-5018x...	300 MTR	4,403	*	12,678	16,555	*
300.00	1500/0.5	550	OLD-5019x...	300 MTR	5,475	*	*	20,914	*
400.00	2013/0.5	590	OLD-5020x...	300 MTR	*	*	*	*	*
530.00	2562/0.5	660	OLD-5021x...	300 MTR	*	*	*	*	*
630.00	3416/0.5	725	OLD-5022x...	300 MTR	*	*	*	*	*

Note: .. denotes the gap for inserting the core - x<Core digit>. (For eg. 1.50 sqmm x 3 Core will be written as OLD-5004x3)

6

CONTROL CABLES

Multistrand bright electrolytic annealed bare copper conductor, FR-LSH PVC Insulated & PVC sheathed multicore round flexible Industrial Control Cables, Voltages Grade 300/500 V. (HSN CODE: 8544)



Size	Config	Amps	Product code	6 Core	7 Core	8 Core	10 Core	12 Core	Size
0.50	16/0.2	5	OLD-6001x...	76	86	101	126	151	0.50
0.75	24/0.2	8	OLD-6002x...	104	117	136	175	206	0.75
1.00	32/0.2	13	OLD-6003x...	131	151	174	216	257	1.00
1.50	30/0.25	17	OLD-6004x...	188	217	245	309	369	1.50
2.50	50/0.25	24	OLD-6005x...	293	334	401	505	598	2.50
4.00	56/0.25	30	OLD-6006x...	616	712	808	1014	1204	4.00
6.00	84/0.3	38	OLD-6007x...	898	1044	1180	*	*	6.00
10.00	140/0.3	52	OLD-6008x...	*	1700	*	*	*	10.00
16.00	126/0.4	70	OLD-6009x...	*	2245	*	*	*	16.00
25.00	196/0.4	88	OLD-6010x...	*	3600	*	*	*	25.00

Size	Config	Amps	Product code	16 Core	19 Core	24 Core	37 Core	50 Core	Size
0.50	16/0.2	5	OLD-6001x...	203	246	300	468	601	0.50
0.75	24/0.2	8	OLD-6002x...	273	333	408	641	833	0.75
1.00	32/0.2	13	OLD-6003x...	351	421	522	819	1,075	1.00
1.50	30/0.25	17	OLD-6004x...	500	609	758	1,196	*	1.50
2.50	50/0.25	24	OLD-6005x...	805	965	*	*	*	2.50

Note: .. denotes the gap for inserting the core - x<Core digit>. (For eg. 1.50 sqmm x 10 Core will be written as OLD-6004x10)



SINGLE CORE CABLES



MULTI CORE CABLES

SCAN TO KNOW MORE ABOUT THE PRODUCT

NOTE

PACKING : ORBIT FR-LSH WIRES are supplied in 100M coils till 10 sqmm after which specified in the above table.

COLOURS : ORBIT FR-LSH WIRES are available in eleven colours: Red, Yellow, Blue, Grey, Purple, Orange, Pink, Violet, Brown, White, Black & Green.

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

7 BRAIDED SHIELDED CABLES

Flexible / Stranded Bare Copper Conductor, FR-LSH Insulated, Annealed Tinned Copper Braided with Optimum co and Outer FR-LSH sheathed Industrial Braided cables, Voltage Grade 300/500V.



Size	Config	Amps	Product code	MOQ	2 Core	3 Core	4 Core	5 Core	6 Core	8 Core
0.50	16/0.2	5	OLD-7001x...	500 MTR	48	64	75	93	115	152
0.75	24/0.2	8	OLD-7002x...	500 MTR	58	79	105	131	157	210
1.00	32/0.2	13	OLD-7003x...	500 MTR	67	93	116	145	184	240
1.50	30/0.25	17	OLD-7004x...	500 MTR	93	130	163	203	259	336
2.50	50/0.25	24	OLD-7005x...	500 MTR	155	212	276	346	408	503
4.00	56/0.25	30	OLD-7006x...	500 MTR	234	325	413	*	*	*
6.00	84/0.3	38	OLD-7007x...	500 MTR	*	*	790	*	*	*
10.00	140/0.3	52	OLD-7008x...	500 MTR	*	*	1,150	*	*	*
16.00	126/0.4	70	OLD-7009x...	500 MTR	*	*	1,900	*	*	*
Size	Config	Amps	Product code	MOQ	10 Core	12 Core	16 Core	19 Core	24 Core	30 Core
0.50	16/0.2	5	OLD-7001x...	500 MTR	192	235	317	373	451	*
0.75	24/0.2	8	OLD-7002x...	500 MTR	264	316	371	445	547	*
1.00	32/0.2	13	OLD-7003x...	500 MTR	289	332	450	524	655	*
1.50	30/0.25	17	OLD-7004x...	500 MTR	436	509	676	788	984	*
2.50	50/0.25	24	OLD-7005x...	500 MTR	*	*	*	*	*	*
4.00	56/0.25	30	OLD-7006x...	500 MTR	*	*	*	*	*	*

8 RUBBER CABLE (EPR)

Multistrand bright electrolytic annealed tinned copper conductor, EPR Insulated & PCP sheathed multicore round flexible Industrial Control Cables, Voltages Grade upto 1100 V. (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG	2 Core	3 Core	3.5 Core	4 Core	5 Core
1.5	48/0.20	24	OLD-8001x...	1000MTS DRUM	154	203	*	247	*
2.5	80/0.20	27	OLD-8002x...	1000MTS DRUM	200	267	*	326	540
4.0	56/0.30	34	OLD-8003x...	1000MTS DRUM	264	384	*	482	809
6.0	85/0.30	44	OLD-8004x...	1000MTS DRUM	420	503	*	645	1,064
10.0	80/0.40	60	OLD-8005x...	500MTS DRUM	803	1,030	*	1,226	*
16.0	126/0.40	81	OLD-8006x...	500MTS DRUM	1,079	1,484	*	1,888	*
25.0	196/0.40	105	OLD-8007x...	500MTS DRUM	1,594	2,201	*	2,758	*
35.0	276/0.40	125	OLD-8008x...	500MTS DRUM	2,106	2,933	*	3,709	*
50.0	396/0.40	160	OLD-8009x...	500MTS DRUM	2,884	4,174	*	5,221	*
70.0	356/0.50	195	OLD-8010x...	500MTS DRUM	*	*	6,657	*	*
95.0	484/0.50	235	OLD-8011x...	500MTS DRUM	*	*	8,975	*	*
120.0	610/0.50	270	OLD-8012x...	500MTS DRUM	*	*	11,506t	*	*

9 WELDING CABLE

Multistrand bright electrolytic annealed bare copper conductor, HOFIR Insulated Industrial cable, Voltages Grade upto 1100 V. (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG	MRP (copper) per mtr
16	509/0.2	120	OLD-9001	500 MTS DRUM	*
25	796/0.2	160	OLD-9002	500 MTS DRUM	*
35	1115/0.2	230	OLD-9003	500 MTS DRUM	766
50	703/0.3	400	OLD-9004	500 MTS DRUM	975
70	999/0.3	600	OLD-9005	500 MTS DRUM	1,365
95	1346/0.3	700	OLD-9006	500 MTS DRUM	1,826
120	1699/0.3	1100	OLD-9007	500 MTS DRUM	2,296

Size	Config	Amps	Product code	PKG	MRP (aluminium) per mtr
35	495/0.3	230	OLD-9008	500 MTS DRUM	*
50	707/0.3	400	OLD-9009	500 MTS DRUM	168
70	999/0.3	600	OLD-9010	500 MTS DRUM	223
95	1346/0.3	700	OLD-9011	500 MTS DRUM	294
120	1699/0.3	1100	OLD-9012	500 MTS DRUM	362

10 SOLAR CABLE

Flexible Tinned Copper Conductor Single Core Multistrand, Cross Linked, Zero Halogen Low Smoke Insulation and Cross Linked Low Smoke Sheathing, Heat Resistant upto 120°C and UV Resistant Solar Cables.



Size	Config	Amps	Product code	PKG	MRP (per mtr)
2.50	36/0.3	8	OLD-10001	500 MTS DRUM	58
4	56/0.3	13	OLD-10002	500 MTS DRUM	78
6	84/0.3	17	OLD-10003	500 MTS DRUM	111
10	140/0.3	24	OLD-10004	500 MTS DRUM	197
16	126/0.4	30	OLD-10005	500 MTS DRUM	*
25	196/0.4	38	OLD-10006	500 MTS DRUM	*



RUBBER CABLES



WELDING CABLES



SOLAR CABLES

SCAN TO KNOW MORE ABOUT THE PRODUCT

NOTE

PACKING : Above cables are supplied in 500M rolls or 500M drum or 1000M drum which are packed as specified above. Cut lengths also available.

COLOURS : Above cables are available in colours: Red, Black, Yellow, Blue.

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

SUBMERSIBLE CABLES

PRODUCT

- SUBMERSIBLE CABLE (3 CORE)
- SUBMERSIBLE CABLE (4 CORE)

PRODUCT FEATURES:



20% HIGHER
CURRENT CARRYING
CAPACITY




MOISTURE
RESISTANT



TOUGH & FLEXIBLE
CABLES




HIGHEST QUALITY
HIGHEST QUALITY COPPER

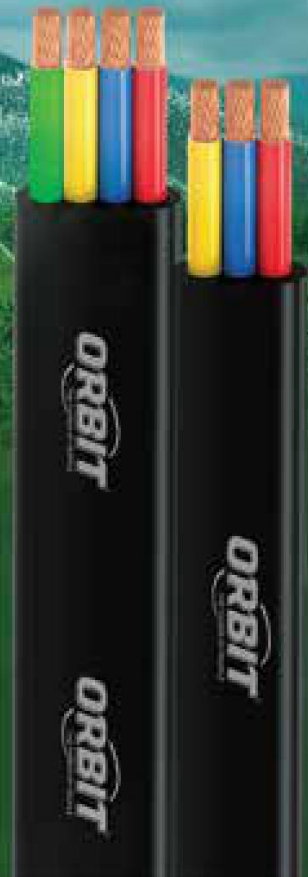

11

SUBMERSIBLE CABLE


Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & FR-LSH sheathed multicore flat submersible cable for working voltages upto and including 1100 Volts, as per IS 694 (HSN CODE: 8544)



FR-LSH THREE CORE FLAT SUBMERSIBLE CABLE

Size	Config	Amps	Product code	PKG	MRP (per mtr)
1.50	22/0.3	5	OLD-11001	1000 MTS DRUM	99
2.50	36/0.3	8	OLD-11002	1000 MTS DRUM	155
4	56/0.3	13	OLD-11003	1000 MTS DRUM	231
6	84/0.3	17	OLD-11004	500 MTS DRUM	336
10	140/0.3	24	OLD-11005	500 MTS DRUM	575
16	126/0.4	30	OLD-11006	500 MTS DRUM	830
25	196/0.4	38	OLD-11007	500 MTS DRUM	1,301
35	276/0.4	112	OLD-11008	500 MTS DRUM	1,775
50	396/0.4	146	OLD-11009	500 MTS DRUM	2,524

FR-LSH THREE CORE FLAT SUBMERSIBLE CABLE



Size	Config	Amps	Product code	PKG	MRP (per mtr)
1.50	22/0.3	5	OLD-12010	1000 MTS DRUM	141
2.50	36/0.3	8	OLD-12011	1000 MTS DRUM	225
4	56/0.3	13	OLD-12012	1000 MTS DRUM	342
6	84/0.3	17	OLD-12013	500 MTS DRUM	451
10	140/0.3	24	OLD-12012	500 MTS DRUM	778



SCAN TO KNOW MORE
ABOUT THE PRODUCT

SUBMERSIBLE CABLES

NOTE

PACKING : ORBIT FR-LSH FLAT CABLES are supplied in 500M coils or 1000M drum which are packed as specified above. DRUM charges will be extra 5% for sizes below 6 sq.mm.

COLOURS : ORBIT FR-LSH FLAT CABLES are available in colours: Red, Black, Yellow, Blue, colour of sheath - Black.

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

COMMUNICATION CABLES

PRODUCT


- SPEAKER WIRE
- CO-AXIAL CABLE
- TELEPHONE CABLE
- CCTV CABLE
- LAN CABLE

PRODUCT FEATURES:



12 SPEAKER WIRE

Multistrand Annealed bare copper conductor, crystal Insulated Industrial Transparent Speaker wires. (HSN CODE: 8544)



Size	Config	Amps	Product code	PKG (90M)	MRP
0.25	14/60	3	OLD-12001	26	1,350
0.50	23/60	5	OLD-12002	20	2,053
0.75	23/76	8	OLD-12003	12	3,292
1.00	40/60	13	OLD-12004	12	3,524
1.50	40/76	17	OLD-12005	12	5,550
2.00	*	24	OLD-12006	*	*
2.50	*	30	OLD-12007	*	*

13 CO-AXIAL CABLE

Electrolytic grade solid annealed bare copper conductor gas injected physical polyethylene foam insulated, wrapped with Aluminium Mylar tape and Al alloy wire braided, Jelly flooded and PVC Jacketing in Black Colour, Co-Axial Industrial Cables. (HSN CODE: 8544)



Product	Conductor	Length	Product code	PKG	MRP
RG - 6	CCS	90MTS	OLD-13001	8	1,470
RG - 6	CCS	305MTS	OLD-13002	2	5,077
RG - 6	Cu	90MTS	OLD-13003	8	2,613
RG - 6	Cu	305MTS	OLD-13004	2	9,090
RG - 11	Cu	305MTS	OLD-13005	1	*
RG - 11	CCS	305MTS	OLD-13006	1	*

14 TELEPHONE CABLE

Solid Electrolytic annealed bare copper conductor Industrial Switchboard & Telephone Cables with high density polyethylene insulation, paired, polyester taped, Nylon Rip Cord and Grey colour sheathed with FR PVC, generally conform to "ITD specification S/WS 113 C" (HSN Code: 8544)



No. of Pair	Config	Length	Product code	PKG	MRP
1	0.51 MM	90MTS	OLD-14001	24	865
2	0.51 MM	90MTS	OLD-14002	16	1,360
3 - 100	0.51 MM	100MTS	OLD-14003	500MTS ROLL	816

15 CCTV CABLE

Annealed Tinned copper conductor, PE Insulated, ATC Braided, Polyester tape screened, PVC outer sheathed Industrial CCTV Camera Cables. (HSN CODE: 8544)



Product	Config	Length	Product code	PKG	MRP
2+1	*	100MTS	OLD-16001	12	34
3+1	*	100MTS	OLD-16002	12	35
4+1	*	100MTS	OLD-16003	16	39
5+1	*	100MTS	OLD-16004	20	45

16 LAN CABLE

Solid bare copper conductor 4 Pair unshielded twisted pair (UTP) Industrial cables for Computer Lan Network with Grey colour & FR PVC Jacket. (HSN Code: 8544)



Product	Config	Length	Product code	PKG	MRP
Cat - 5e	4 PAIR	305MTS	OLD-17001	4	9,639
Cat - 6e	4 PAIR	305MTS	OLD-17002	2	13,191
Cat - 6e(Outdoor)	4 PAIR	305MTS	OLD-17003	2	14,210



SPEAKER WIRE CABLES



CO-AXIAL CABLES



TELEPHONE CABLES



CCTV CABLES



LAN CABLES

SCAN TO KNOW MORE ABOUT THE PRODUCT

NOTE

PACKING : The length of the coils and drums are written in the table above. Supplied against standard packaging only.

COLORS : Co-axial cables are available in two colors Black & White.

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

ALUMINIUM & COPPER WIRES

PRODUCT

- ▶ ALUMINIUM VIR
- ▶ ALUMINIUM CTS
- ▶ ALUMINIUM SINGLE CORE
- ▶ ALUMINIUM SOLID
- ▶ COPPER VIR
- ▶ COPPER CTS
- ▶ COPPER SOLID SINGLE CORE
- ▶ TWIN TWISTER
- ▶ FLEXIBLE CORD CABLES



17 ALUMINIUM SINGLE CORE WIRE

Single Core Aluminium Conductor PVC Insulated Electric cable Voltages Grade upto 1100 V.



Size	Config	Amps	Product code	PKG	MRP
25	7/2.10 MM	*	OLD-17001	500 MTS	58
35	7/2.52 MM	*	OLD-17002	500 MTS	81
50	7/3.01 MM	*	OLD-17003	500 MTS	115
70	19/2.16 MM	*	OLD-17004	500 MTS	161
95	19/2.52 MM	*	OLD-17005	500 MTS	219
120	19/2.84 MM	*	OLD-17006	500 MTS	276
150	37/2.27 MM	*	OLD-17007	500 MTS	351
185	37/2.52 MM	*	OLD-17008	500 MTS	433
240	37/2.87 MM	*	OLD-17009	500 MTS	561
300	37/3.21 MM	*	OLD-17010	500 MTS	714
400	61/2.90 MM	*	OLD-17011	500 MTS	952
630	61/3.63 MM	*	OLD-17012	500 MTS	1,500

18 ALUMINIUM VIR WIRE

Single Core Aluminium Conductor PVC Insulated Electric cable Voltages Grade upto 1100 V.



Size	Config	Amps	Product code	PKG	MRP (90M)
2.50	3/20	*	OLD-18001	20	660
4	7/20	*	OLD-18002	10	1,477
6	7/18	*	OLD-18003	7	2,084
10	7/54	*	OLD-18004	6	2,873
16	7/16	*	OLD-18005	6	4,105
50	19/64	*	OLD-18006	2	10,584

19 ALUMINIUM CTS WIRE

Single Core Aluminium Conductor PVC Insulated & Sheathed Electric cable Voltages Grade.



Size	Config	Amps	Product code	PKG	MRP (90M)
2.50	3/20	*	OLD-19001	20	644
4	7/20	*	OLD-19002	10	1,437
6	7/18	*	OLD-19003	7	2,013
10	7/54	*	OLD-19004	6	2,636
16	7/16	*	OLD-19005	6	3,928

20 ALUMINIUM SOLID WIRESingle Core Aluminium Solid Conductor PVC Insulated Electric cable Voltages Grade.
HIGH CLASS ALUMINIUM SOLID WIRE

Size	Config	Amps	Product code	PKG	MRP (90M)
1.50	*	*	OLD-20001	28	416
2.50	1/1.78 MM	*	OLD-20002	24	587
4	1/2.26 MM	*	OLD-20003	20	915
6	1/2.76 MM	*	OLD-20004	16	1,255
10	1/3.57 MM	*	OLD-20005	12	4,597

21 ALUMINIUM SOLID WIRE (TWIN CORE)

Aluminium Solid Conductor PVC Insulated & FR-LSH Sheathed Electric cable Voltages Grade.

**ECO CLASS ALUMINIUM SOLID WIRE**

Size	Config	Amps	Product code	PKG	MRP (90M)
2.50	1/1.78 MM	*	OLD-21001	24	1,629
4	1/2.26 MM	*	OLD-21002	20	2,112
6	1/2.76 MM	*	OLD-21003	16	2,966
10	1/3.57 MM	*	OLD-21004	12	4,470

HIGH CLASS ALUMINIUM SOLID WIRE

Size	Config	Amps	Product code	PKG	MRP (90M)
2.50	1/1.78 MM	*	OLD-21005	24	1,759
4	1/2.26 MM	*	OLD-21006	20	2,281
6	1/2.76 MM	*	OLD-21007	16	3,204
10	1/3.57 MM	*	OLD-21008	12	4,827

ALUMINIUM STRANDED SOLID WIRE

Size	Config	Amps	Product code	PKG	MRP (400M)
2.50	1/1.78 MM	*	OLD-21010	1	14,849
4	1/2.26 MM	*	OLD-21011	1	17,576
6	1/2.76 MM	*	OLD-21012	1	22,076

22 COPPER VIR WIRE

Single Core Electrolyte Annealed Bare Copper Conductor PVC Insulated Electric cable Voltages Grade.



Size	Config	Amps	Product code	PKG	MRP (90M)
0.75	1/038 MM	8	OLD-22001	20 COILS	1,564
1	1/041 MM	13	OLD-22002	20 COILS	2,009
2.50	3/036 MM	24	OLD-22003	12 COILS	4,196
4	7/034 MM	30	OLD-22004	6 COILS	8,424
6	7/041 MM	38	OLD-22005	4 COILS	11,349
10	7/053 MM	52	OLD-22006	2 COILS	18,913
16	7/064 MM	70	OLD-22007	1 COIL	28,435
25	19/1.30 MM	88	OLD-22008	500 MTS	56,478
35	19/1.53 MM	112	OLD-22009	1000 MTS	78,793
50	19/1.83 MM	146	OLD-22010	1000 MTS	1,180
70	37/1.55 MM	216	OLD-22011	1000 MTS	1,697
95	37/1.80 MM	262	OLD-22012	500 MTS	2,301
120	37/2.03 MM	310	OLD-22013	500 MTS	3,013

23 COPPER CTS WIRE

Single Core Electrolyte Annealed Bare Copper Conductor XLPE Insulated & FR-LSH Sheathed Electric cable Voltages Grade upto 1100 V.



Size	Config	Amps	Product code	PKG	MRP (90M)
2.50	3/20	24	OLD-23001	26	*
4	7/20	30	OLD-23002	20	9,661
6	7/18	38	OLD-23003	12	12,603
10	7/054	52	OLD-23004	12	*
16	7/16	70	OLD-23005	12	*

24 SOLID SINGLE CORE COPPER WIRE

Single Core Electrolyte Annealed Bare Solid Copper Conductor PVC Insulated Electric cable Voltages Grade upto 1100 V.



Size	Config	Amps	Product code	PKG	MRP
2.50	3/20	24	OLD-24001	26	*
4	7/20	30	OLD-24002	20	9,661
6	7/18	38	OLD-24003	12	12,603
10	7/054	52	OLD-24004	12	*
16	7/16	70	OLD-24005	12	*

25 TWIN TWISTED

PVC Insulated Twin Twisted Electric cable Voltages Grade upto 1100 V.



Size	Config	Amps	Product code	PKG	MRP (90M)
*	10/076	*	OLD-25001	30	1,368
*	14/0052	*	OLD-25002	20	943
*	23/0052	*	OLD-25003	20	1,437
*	40/0052	*	OLD-25004	16	1,863
*	40/0060	*	OLD-25005	16	2,504
*	23/76 (Tinned Copper)	*	OLD-25006	16	3,415

26 FLEXIBLE CORD CABLES

PVC Insulated & PVC Sheathed Flexible Cord Electric cable Voltages Grade upto 1100 V.



Size	Config	Product code	PKG	MRP (90M)
0.5	23/0060 x 2 Core Flat	OLD-26001	20	1,699
0.5	23/0060 x 2 Core Parallel	OLD-26002	20	1,667
0.5	23/0060 x 2 Core Round	OLD-26003	20	2,217
0.5	23/0060 x 3 Core Round	OLD-26004	16	2,983
0.75	40/0060 x 2 Core Round	OLD-26005	14	3,411
0.75	40/0060 x 3 Core Round	OLD-26006	14	5,039

NOTES

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

TERMS & CONDITIONS

Prices

GST extra as applicable.

Printing

Orbit Wire and Cables are printed with Company (Name, Logo, Sizelsq.mm) & Voltage Grade.

Delivery

Value upto 3 lakhs on 'TO-PAY' basis & above, F.O.R. any station in India by road transport.

Product Code

The full product code is of 8 to 11 digits. For example :

- First three letters are for list type i.e. (OLD).
- Next two letters and number represent a category of product and Product number i.e. (IC - INDUSTRIAL CABLES, 5 - PRODUCT NUMBER "IC5").
- Last digits are for Serial Number and Core i.e. (8x3).

Alteration

This Price List supersedes all our earlier price lists and is subject to change without notice.

NOTE

As per the international practice which is also adopted by BIS, for all cables with ISI mark the size of the cond decided by its resistance only. The construction of the conductor mentioned in the price-list are only for guidelinr as are per market convention, it may vary within the prescribed limit of IS 8130, with related classes and tables.



LOYALTY PROGRAM



To Download the
ORBIT FORTUNE



DEALER LOYALTY PROGRAM

Get registered as dealer and get

₹120 on every scan

Refer Inside (Dust Flap of Master Box).

ELECTRICIAN LOYALTY PROGRAM

₹10 on every scan

Refer Inside (Dust Flap of Mono Box).

STEPS TO LEARN



REGISTER



SCAN



EARN



REDEEM

BENEFITS



BANK TRANSFERS



COUPONS



GOLD



GIFTS

ORBIT
FORTUNE 2.0

KISMAT KA KONNECTION

SCAN THE QR CODE



MANUFACTURING

UNIT - 1 : **ORBIT WIRES INDIA PVT LTD** SURVEY NO. 2450, AHMEDABAD - MEHSANA HIGHWAY, NEAR SCODA TUBES LIMITED, VILLAGE - RAJPUR, TALUKA - KADI, DISTRICT - MEHSANA, GUJARAT - 382715.

UNIT - 2 : **ORBIT WIRES AND CABLES PVT LTD.** 179, FIE PATPARGANJ INDUSTRIAL AREA, DELHI - 110092.

CORPORATE OFFICE

36, 3RD FLOOR, GOVINDAPPA NAICKEN STREET, BROADWAY, CHENNAI-600 001.

BRANCH OFFICE

- TAMIL NADU +91 99401 66624 • KARNATAKA +91 91500 33351 • GOA +91 91500 33351 • TELANGANA
- ANDHRA PRADESH +91 74000 14000 • MAHARASHTRA +91 91500 87798 • GUJRAT +91 91500 87792 • RAJASTHAN +91 89258 10431 •
- DELHI +91 89259 06640 • UTTAR PRADESH +91 89258 10430 • PUNJAB +91 89258 67569 • UTTARAKHAND
- KASHMIR +91 89258 10442 • CHATTISGARH +91 91500 26752 • MADHYA PRADESH +91 00000 00000


FOLLOW US ON: • WEBSITE : WWW.ORBITCABLES.COM • CUSTOMER SUPPORT : +91 79000 39000 • MAIL : SUPPORT@ORBITELECTRIC.IN

ORBIT[®]
THE POWER OF PEOPLE



1 ALUMINIUM ARMoured

Power Cables, Solid Aluminum conductor up to 10 sqmm balance stranded conductor, XLPE Insulated, cores laid up, FRLS PVC tape/Extruded Innersheathed for Multicore Cables , Armour extruded PVC Type ST2 sheathed, 650/1100V grade as per IS 7098(Part 1) 1988

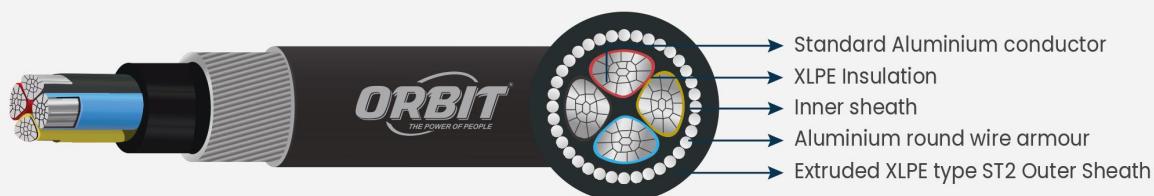

ALUMINIUM ARMoured CABLE

Size	Product code	1 Core	2 Core	3 Core	3.5 Core	4 Core	Size
		A2XWaY / A2XFaY	A2XWY / A2XFY	A2XWY / A2XFY	A2XFY	A2XWY / A2XFY	
4.00	OPC-PC1-1X...	*	158.00	173.00	*	212.00	4.00
6.00	OPC-PC1-2X...	*	190.00	217.00	*	256.00	6.00
10.00	OPC-PC1-3X...	*	224.00	271.00	*	327.00	10.00
16.00	OPC-PC1-4X...	*	277.00	322.00	*	388.00	16.00
25.00	OPC-PC1-5X...	*	315.00	415.00	477.00	517.00	25.00
35.00	OPC-PC1-6X...	*	416.00	544.00	622.00	696.00	35.00
50.00	OPC-PC1-7X...	*	*	736.00	807.00	944.00	50.00
70.00	OPC-PC1-8X...	*	*	993.00	1,100.00	1,262.00	70.00
95.00	OPC-PC1-9X...	*	*	1,228.00	1,413.00	1,588.00	95.00
120.00	OPC-PC1-10X...	*	*	1,557.00	1,826.00	2,008.00	120.00
150.00	OPC-PC1-11X...	*	*	1,896.00	2,149.00	2,425.00	150.00
185.00	OPC-PC1-12X...	*	*	2,258.00	2,714.00	2,956.00	185.00
240.00	OPC-PC1-13X...	*	*	2,935.00	3,382.00	3,838.00	240.00
300.00	OPC-PC1-14X...	*	*	3,548.00	4,085.00	4,644.00	300.00
400.00	OPC-PC1-15X...	*	*	*	5,439.00	6,203.00	400.00

Note: ... denotes the gap for inserting the core - X<Core digit>. (For eg. 10.00 sqmm x 4 Core will be written as PC1-3X4) & for PVC add prefix of "P" to the product code

Loading factor for Special FRLS PVC Construction is 6% and is subject to availability

NOTE


PACKING : ORBIT FRLSH ARMoured CABLES 4.00 sqmm to 10.00 sqmm are supplied in 1000m Drums, 16.00 sqmm and above are supplied in 500m Drum.

COLOURS : BLACK OUTER SHEATHING ONLY

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

2 ALUMINIUM UNARMoured

Solid Aluminum conductor up to 10 sqmm balance stranded conductor, XLPE Insulated, cores laid up, FRLS PVC tape/Extruded Innersheathed for Multicore Cables, Unarmoured, extruded PVC Type ST2 sheathed, 650/1100V grade as per IS7098(Part 1) 1988

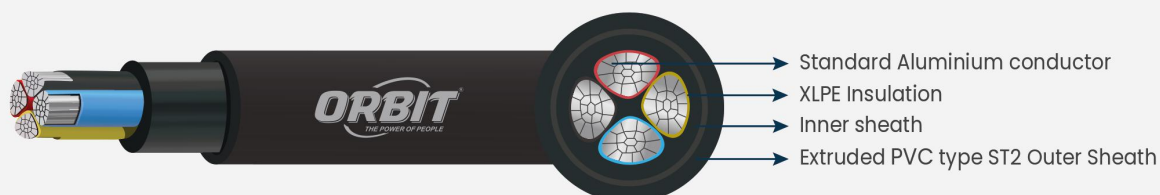

ALUMINIUM UNARMoured CABLE

Size	Product code	1 Core	2 Core	3 Core	3.5 Core	4 Core	Size
		A2XY	A2XY	A2XY	A2XY	A2XY	
4.00	OPC-PC2-1X...	*	101.00	121.00	*	146.00	4.00
6.00	OPC-PC2-2X...	*	129.00	159.00	*	192.00	6.00
10.00	OPC-PC2-3X...	*	174.00	210.00	*	250.00	10.00
16.00	OPC-PC2-4X...	*	209.00	273.00	*	335.00	16.00
25.00	OPC-PC2-5X...	*	271.00	369.00	449.00	487.00	25.00
35.00	OPC-PC2-6X...	*	332.00	469.00	540.00	603.00	35.00
50.00	OPC-PC2-7X...	*	*	651.00	754.00	843.00	50.00
70.00	OPC-PC2-8X...	*	*	884.00	1,033.00	1,160.00	70.00
95.00	OPC-PC2-9X...	*	*	1,152.00	1,359.00	1,522.00	95.00
120.00	OPC-PC2-10X...	*	*	1,439.00	1,714.00	1,885.00	120.00
150.00	OPC-PC2-11X...	*	*	1,586.00	1,823.00	2,087.00	150.00
185.00	OPC-PC2-12X...	*	*	1,963.00	2,282.00	2,580.00	185.00
240.00	OPC-PC2-13X...	*	*	2,563.00	2,967.00	3,371.00	240.00
300.00	OPC-PC2-14X...	*	*	3,173.00	3,673.00	*	300.00
400.00	OPC-PC2-15X...	*	*	*	4,809.00	*	400.00

Note: ... denotes the gap for inserting the core - X<Core digit>. (For eg. 10.00 sqmm x 4 Core will be written as PC2-3X4) & for PVC add prefix of "-P" to the product code

Loading factor for Special FRLS PVC Construction is 6% and is subject to availability

NOTE

PACKING : ORBIT FRLSH ARMoured CABLES 4.00 sqmm to 10.00 sqmm are supplied in 1000m Drums, 16.00 sqmm and above are supplied in 500m Drum.

MOQ : Minimum order quantity - 5Kms


COLOURS : BLACK OUTER SHEATHING ONLY

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

POWER CABLES

3 COPPER ARMoured

Solid Copper conductor upto 6sqmm balance Stranded, XLPE Insulated, cores laid up, PVC tape innersheathed for Multicore Cables, Armour, extruded PVC Type ST2 Sheathed, 650/1100 V grade as per IS 7098 (Part 1) 1988

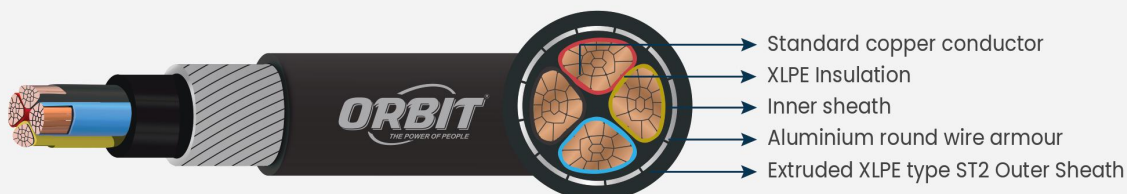

COPPER ARMoured CABLE

Size	Product code	1 Core	2 Core	3 Core	3.5 Core	4 Core	Size
		2XWaY / 2XFaY	2XWY / 2XFY	2XWY / 2XFY	2XFY	2XWY / 2XFY	
4.00	OPC-PC3-1X...	*	366.00	498.00	*	639.00	4.00
6.00	OPC-PC3-2X...	*	516.00	716.00	*	925.00	6.00
10.00	OPC-PC3-3X...	*	822.00	1,161.00	*	1,494.00	10.00
16.00	OPC-PC3-4X...	*	1,215.00	1,763.00	*	2,311.00	16.00
25.00	OPC-PC3-5X...	*	1,967.00	2,695.00	3,244.00	3,566.00	25.00
35.00	OPC-PC3-6X...	*	2,707.00	3,706.00	4,269.00	4,916.00	35.00
50.00	OPC-PC3-7X...	*	3,556.00	5,259.00	6,104.00	6,954.00	50.00
70.00	OPC-PC3-8X...	*	5,291.00	7,490.00	8,700.00	9,932.00	70.00
95.00	OPC-PC3-9X...	*	6,803.00	10,079.00	11,815.00	13,396.00	95.00
120.00	OPC-PC3-10X...	*	8,548.00	12,688.00	15,763.00	16,863.00	120.00
150.00	OPC-PC3-11X...	*	*	16,481.00	19,022.00	21,917.00	150.00
185.00	OPC-PC3-12X...	*	*	20,439.00	23,893.00	27,168.00	185.00
240.00	OPC-PC3-13X...	*	*	26,536.00	30,855.00	35,250.00	240.00
300.00	OPC-PC3-14X...	*	*	33,057.00	38,589.00	44,100.00	300.00
400.00	OPC-PC3-15X...	*	*	*	*	*	400.00

Note: ... denotes the gap for inserting the core - X<Core digit>. (For eg. 10.00 sqmm x 4 Core will be written as PC3-3X4) & for PVC add prefix of "-P" to the product code

Loading factor for Special FRLS PVC Construction is 6% and is subject to availability

NOTE

PACKING : ORBIT FRLSH ARMoured CABLES 4.00 sqmm to 10.00 sqmm are supplied in 1000m Drums, 16.00 sqmm and above are supplied in 500m Drum.

COLOURS : BLACK OUTER SHEATHING ONLY

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

4 CONTROL CABLE COPPER ARMoured

Solid Copper conductor, XLPE Insulated, cores laid up, PVC tape innersheathed for Multicore Cables, Armour, extruded PVC Type ST2 Sheathed, 650/1100 V grade as per IS 7098 (Part 1) 1988



CONTROL CABLE COPPER ARMoured CABLE

Size	1.50 sqmm	2.50 sqmm
Product code	OPC-PC4-1X...	OPC-PC4-2X...
Core	2XWY / 2XFY	2XWY / 2XFY
2	183.00	273.00
3	244.00	350.00
4	304.00	446.00
5	355.00	525.00
6	428.00	633.00
7	483.00	734.00
8	549.00	828.00
10	657.00	1,009.00
12	759.00	1,181.00
14	874.00	1,363.00
16	985.00	1,552.00
19	1,151.00	1,825.00
24	1,456.00	2,261.00
27	1,623.00	2,710.00
30	1,799.00	3,123.00
37	2,368.00	3,800.00
44	2,786.00	4,486.00
61	4,158.00	6,377.00

Note: ... denotes the gap for inserting the core - X<Core digit>. (For eg. 1.50 sqmm x 2 Core will be written as PC4-1X2) & for PVC add prefix of "P" to the product code

Loading factor for Special FRLS PVC Construction is 6% and is subject to availability

NOTE

PACKING : ORBIT FRLSH ARMoured CABLES are supplied in 1000m Drums.


COLOURS : BLACK OUTER SHEATHING ONLY

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

POWER CABLES

5 COPPER UNARMoured

Solid/Stranded Copper conductor, XLPE Insulated, cores laid up, PVC tape/PVC Extruded Innersheathed for Multicore Cables, Unarmoured, extruded PVC Type ST2 Sheathed, 650/1100 V grade as per IS 7098 (Part 1) 1988

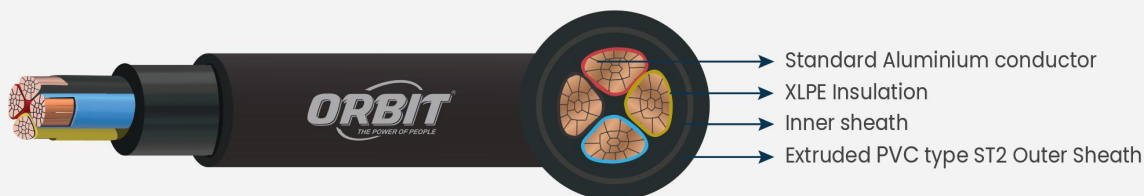

COPPER UNARMoured CABLE

Size	Product code	1 Core	2 Core	3 Core	3.5 Core	4 Core	Size
		2XY	2XY	2XY	2XY	2XY	
4.00	OPC-PC5-1X...	*	313.00	437.00	*	570.00	4.00
6.00	OPC-PC5-2X...	*	441.00	635.00	*	817.00	6.00
10.00	OPC-PC5-3X...	*	754.00	1,099.00	*	1,321.00	10.00
16.00	OPC-PC5-4X...	*	1,099.00	1,618.00	*	2,097.00	16.00
25.00	OPC-PC5-5X...	*	1,795.00	2,595.00	3,137.00	3,261.00	25.00
35.00	OPC-PC5-6X...	*	2,431.00	3,612.00	4,157.00	4,540.00	35.00
50.00	OPC-PC5-7X...	*	3,552.00	4,967.00	5,776.00	6,590.00	50.00
70.00	OPC-PC5-8X...	*	4,959.00	7,190.00	8,067.00	9,553.00	70.00
95.00	OPC-PC5-9X...	*	6,704.00	9,993.00	11,722.00	13,294.00	95.00
120.00	OPC-PC5-10X...	*	8,454.00	12,277.00	15,026.00	16,774.00	120.00
150.00	OPC-PC5-11X...	*	*	15,718.00	18,150.00	20,929.00	150.00
185.00	OPC-PC5-12X...	*	*	19,541.00	22,862.00	26,010.00	185.00
240.00	OPC-PC5-13X...	*	*	25,374.00	29,548.00	33,777.00	240.00
300.00	OPC-PC5-14X...	*	*	31,704.00	36,970.00	42,252.00	300.00
400.00	OPC-PC5-15X...	*	*	*	*	*	400.00

Note: ... denotes the gap for inserting the core - X<Core digit>. (For eg. 10.00 sqmm x 4 Core will be written as PC5-3X4) & for PVC add prefix of "-P" to the product code

Loading factor for Special FRLS PVC Construction is 6% and is subject to availability

NOTE

PACKING : ORBIT FRLSH ARMoured CABLES 4.00 sqmm to 10.00 sqmm are supplied in 1000m Drums, 16.00 sqmm and above are supplied in 500m Drum.


COLOURS : BLACK OUTER SHEATHING ONLY

MOQ : Minimum order quantity - 5Kms

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

6 CONTROL CABLE COPPER UNARMoured

Solid/Stranded Copper conductor, XLPE Insulated, cores laid up, PVC tape/PVC Extruded Innersheathed for Multicore Cables, Unarmoured, extruded PVC Type ST2 Sheathed, 650/1100 V grade as per IS 7098 (Part 1) 1988

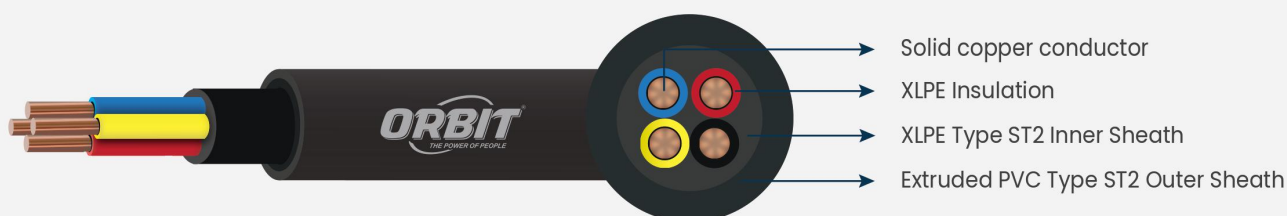

CONTROL CABLE COPPER UNARMoured CABLE

Size	1.50 sqmm	2.50 sqmm
Product code	OPC-PC6-1X...	OPC-PC6-2X...
Core	2XY	2XY
2	125.00	214.00
3	191.00	301.00
4	243.00	390.00
5	275.00	463.00
6	321.00	570.00
7	376.00	629.00
8	457.00	726.00
10	559.00	878.00
12	618.00	1,062.00
14	701.00	1,231.00
16	791.00	1,398.00
19	931.00	1,655.00
24	1,193.00	2,149.00
27	1,333.00	2,475.00
30	1,557.00	2,865.00
37	2,050.00	3,512.00
44	2,420.00	4,159.00
61	3,664.00	5,735.00

Note: ... denotes the gap for inserting the core - X<Core digit>. (For eg. 1.50 sqmm x 2 Core will be written as PC6-1X2) & for PVC add prefix of "-P" to the product code

Loading factor for Special FRLS PVC Construction is 6% and is subject to availability

NOTE

PACKING : ORBIT FRLSH ARMoured CABLES are supplied in 1000m Drums.

COLOURS : BLACK OUTER SHEATHING ONLY

MOQ : Minimum order quantity - 5Kms

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

7 COMMUNICATION ARMoured

Description	Product Code	Master Packaging	Price
RG-6 Copper Co-axial Armoured	OPC-PC7-1	1000mtrs	180.00
RG-11 Copper Co-axial Armoured	OPC-PC7-2	500mtrs	330.00
CAT6 Communication Armoured	OPC-PC7-3	1000mtrs	201.00
1.50 sqmm x 2 Core Shielded Armoured	OPC-PC7-4	1000mtrs	253.00
1.50 sqmm x 3 Core Shielded Armoured	OPC-PC7-5	1000mtrs	335.00
1.50 sqmm x 4 Core Shielded Armoured	OPC-PC7-6	1000mtrs	396.00
1.50 sqmm x 6 Core Shielded Armoured	OPC-PC7-7	500mtrs	538.00
1.50 sqmm x 12 Core Shielded Armoured	OPC-PC7-8	500mtrs	845.00
1.50 sqmm x 24 Core Shielded Armoured	OPC-PC7-9	1000mtrs	1,731.00
2.50 sqmm x 2 Core Shielded Armoured	OPC-PC7-10	1000mtrs	402.00
2.50 sqmm x 3 Core Shielded Armoured	OPC-PC7-11	500mtrs	462.00
2.50 sqmm x 4 Core Shielded Armoured	OPC-PC7-12	500mtrs	660.00
5 Pair Telephone Armoured	OPC-PC7-13	500mtrs	191.00
10 Pair Telephone Armoured	OPC-PC7-14	500mtrs	300.00
20 Pair Telephone Armoured	OPC-PC7-15	500mtrs	498.00
50 Pair Telephone Armoured	OPC-PC7-16	500mtrs	1,149.00
100 Pair Telephone Armoured	OPC-PC7-17	500mtrs	2,169.00
1.50 sqmm x 2 Core Fire Survival Armoured	OPC-PC7-18	1000mtrs	340.00

Loading factor for Special PVC Construction is 6% and is subject to availability

NOTE

PACKING : ORBIT FRLSH ARMoured CABLES are supplied in 1000m Drums and 500m Drums.

COLOURS : BLACK OUTER SHEATHING ONLY

MOQ : Minimum order quantity - 5Kms, may change for item to item

AVAILABILITY: The items marked * are subjected to availability, please refer to marketing department for delivery confirmation indicating quantity, packing length, colour etc.

SCAN THE QR CODE



MANUFACTURING

UNIT - 1 : **ORBIT WIRES INDIA PVT LTD** SURVEY NO. 2450, AHMEDABAD - MEHSANA HIGHWAY, NEAR SCODA TUBES LIMITED, VILLAGE - RAJPUR, TALUKA - KADI, DISTRICT - MEHSANA, GUJARAT - 382715.

UNIT - 2 : **ORBIT WIRES AND CABLES PVT LTD**, 179, FIE PATPARGANJ INDUSTRIAL AREA, DELHI - 110092.

CORPORATE OFFICE

36, 3RD FLOOR, GOVINDAPPA NAICKEN STREET, BROADWAY, CHENNAI-600 001.

BRANCH OFFICE

• TAMIL NADU +91 99401 66624 • KARNATAKA +91 91500 33351 • GOA +91 91500 33351 • TELANGANA
• ANDHRA PRADESH +91 74000 14000 • MAHARASHTRA +91 91500 87798 • GUJRAT +91 91500 87792 • RAJASTHAN +91 89258 10431 •
DELHI +91 89259 06640 • UTTAR PRADESH +91 89258 10430 • PUNJAB +91 89258 67569 • UTTARAKHAND
• KASHMIR +91 89258 10442 • CHATTISGARH +91 91500 26752 • MADHYA PRADESH +91 00000 00000

FOLLOW US ON: • WEBSITE : WWW.ORBITCABLES.COM • CUSTOMER SUPPORT : +91 79000 39000 • MAIL : SUPPORT@ORBIELECTRIC.IN